

FILTRO ICE



FEATURES

- ✓ Laminated filter manufactured with polyester resin and fiber glass.
- ✓ Excellent exterior finish in gelcoat.
- ✓ Filter color: RAL 5024
- ✓ ¼" air and water drain
- ✓ Connections to six positions multiport valve with: filtration, backwash, rinse, recirculate, waste and closed operations.
- ✓ Black top lid with screws.
- ✓ Maximum temperature: 50°C
- ✓ Maximum pressure: 2.5 bar.

CARACTERÍSTICAS

- ✓ Filtros laminados con resina de polyester y fibra de vidrio.
- ✓ Excelente acabado exterior en gelcoat.
- ✓ Filtro color: RAL 5024
- ✓ Purga de agua y aire ¼"
- ✓ Conexiones para válvula selectora de seis vías con operaciones de: filtración, lavado, enjuague, recirculación, vaciado y cerrado.
- ✓ Tapa superior con tornillos negra.
- ✓ Máxima temperatura: 50°C.
- ✓ Máxima presión: 2.5 bar.

FILTER DETAILS



- Cone diffuser
- Cono difusor



- Fitted with 1" laterals
- Equipado con brazos colectores 1"




- Black top lid with screws
- Tapa superior negra con tornillos

TECHNICAL DATA

PACKAGING

| Code | Model (mm) | Connections (mm/inch) | | Filtering velocity (m³/h/m²) | Filtration Area (m²) | Flow (m³/h) | Maximum pressure (bar) | Sand (0.4-0.8mm) (kg) | Net weight (kg) | D (mm) | H (mm) | M (mm) | N (mm) | Units per pallet | Box dimension (cm) |
|------------|------------|-----------------------|------|------------------------------|----------------------|-------------|------------------------|-----------------------|-----------------|--------|--------|--------|--------|------------------|--------------------|
| | | mm | inch | | | | | | | | | | | | |
| 73177-0100 | 350 | 50 | 1 ½" | 50 | 0.096 | 5 | 2.5 | 50 | 15 | 390 | 755 | 393 | 268 | 15 | 39x39x76 |
| 73178-0100 | 450 | 50 | 1 ½" | 50 | 0.16 | 8 | 2.5 | 70 | 15 | 520 | 760 | 434 | 309 | 10 | 52x52x76 |
| 73179-0100 | 500 | 50 | 1 ½" | 50 | 0.19 | 10 | 2.5 | 95 | 17 | 520 | 855 | 417 | 292 | 8 | 56x56x85 |
| 73180-0100 | 600 | 50 | 1 ½" | 50 | 0.30 | 14 | 2.5 | 125 | 21 | 560 | 850 | 442 | 317 | 8 | 65x65x86 |
| 73181-0100 | 650 | 50 | 1 ½" | 50 | 0.33 | 17 | 2.5 | 200 | 22 | 700 | 890 | 479 | 354 | 8 | 70x70x89 |
| 73182-0100 | 750 | 63 | 2" | 50 | 0.44 | 22 | 2.5 | 290 | 30 | 800 | 930 | 555 | 325 | 2 | 80x80x93 |
| 73183-0100 | 900 | 63 | 2" | 50 | 0.64 | 32 | 2.5 | 500 | 48 | 960 | 1100 | 659 | 389 | 2 | 96x96x110 |

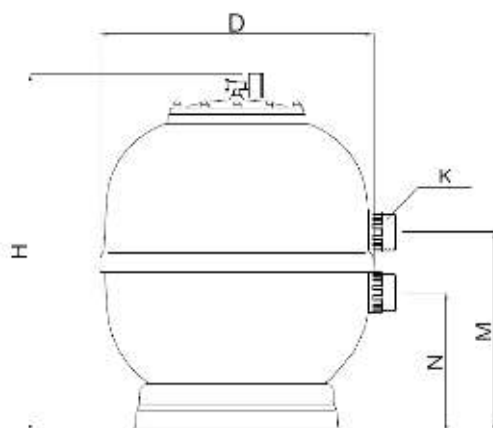

TESTED
ACCORDING TO
EN16713-1

PROBADO DE
ACUERDO A
EN16713-1